


F5CAB1 Test Papers, F5CAB1 Dumps Download

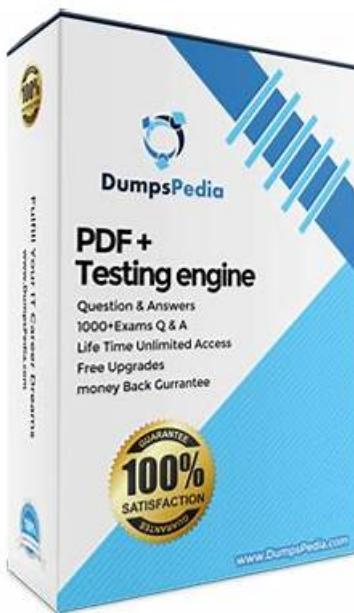

Actual4Cert has designed a F5 F5CAB1 pdf dumps format that is easy to use. Anyone can download BIG-IP Administration Install, Initial Configuration, and Upgrade F5CAB1 pdf questions file and use it from any location or at any time. F5 PDF Questions files can be used on laptops, tablets, and smartphones. Moreover, you will get actual BIG-IP Administration Install, Initial Configuration, and Upgrade F5CAB1 Exam Questions in this BIG-IP Administration Install, Initial Configuration, and Upgrade F5CAB1 pdf dumps file.

F5 F5CAB1 Exam Syllabus Topics:

Topic	Details
Topic 1	<ul style="list-style-type: none">• BIG IP Administration Support and Troubleshooting: This section of the exam measures skills of Network Administrators and covers identifying and resolving common issues that affect BIG IP operation. It focuses on using logs, statistics, diagnostic tools, and basic troubleshooting methods to restore normal traffic flow and maintain stable application delivery.

Topic 2	<ul style="list-style-type: none"> BIG IP Administration Control Plane Administration: This section of the exam measures skills of System Administrators and covers managing the control plane where BIG IP is configured and administered. It includes working with user accounts, roles, device settings, configuration management, and using the graphical interface and command line for daily administrative tasks.
Topic 3	<ul style="list-style-type: none"> BIG IP Administration Data Plane Concepts: This section of the exam measures skills of Network Administrators and covers how BIG IP handles application traffic on the data plane. It includes understanding flow of traffic, key data path components, basic concepts of load balancing, and how security and performance features affect user traffic.
Topic 4	<ul style="list-style-type: none"> BIG IP Administration Install Initial Configuration and Upgrade: This section of the exam measures skills of System Administrators and covers the lifecycle tasks for deploying and maintaining a BIG IP system. It includes installing the platform, performing initial setup, applying licenses, configuring basic networking, and planning and executing software upgrades and hotfixes.
Topic 5	<ul style="list-style-type: none"> BIG IP Administration Data Plane Configuration: This section of the exam measures skills of System Administrators and covers configuring BIG IP objects that control data plane behavior. It focuses on setting up virtual servers, pools, nodes, monitors, and profiles so that applications are delivered reliably and efficiently according to design requirements.

>> **F5CAB1 Test Papers** <<

F5CAB1 Dumps Download, Vce F5CAB1 Format

The F5CAB1 Practice Exam software is specially made for the students so they can feel real-based examination scenarios and feel some pressure on their brains and don't feel excessive issues while giving the final F5 exam. There are a lot of customers that are currently using Actual4Cert and are satisfied with it. Actual4Cert has designed this product after getting positive feedback from professionals and is rated one of the best study materials for the preparation of the F5 F5CAB1 Exam.

F5 BIG-IP Administration Install, Initial Configuration, and Upgrade Sample Questions (Q26-Q31):

NEW QUESTION # 26

A BIG-IP Administrator is using Secure Copy Protocol (SCP) to transfer a TMOS image to the BIG-IP system in preparation for an upgrade.

To what directory should the file be transferred?

- A. **/shared/images/**
- B. /var/images/
- C. /local/images/

Answer: A

Explanation:

BIG-IP systems require all ISO images (base TMOS images and HotFix images) to be stored in a specific directory used for software installation:

/shared/images/

This directory:

- * Is the only supported location from which the BIG-IP software installation system validates and installs ISO files
- * Is accessible by both the GUI and TMSH installers
- * Has adequate storage space allocated specifically for images
- * Is part of the shared partition that persists across reboots

When transferring images via SCP, the administrator must copy them directly into /shared/images/ so that:

- * The GUI (System # Software Management # Available Images) can detect the image
- * TMSH install software image commands can reference it

Other directories such as /local/images/ or /var/images/ are not valid storage paths for software images.

NEW QUESTION # 27

An F5 BIG-IP Administrator is asked to report which modules are provisioned on the BIG-IP.

In which two ways can this be done?

(Choose two.)

- A. Via TMSH with `show /sys provision`
- B. Via TMSH with `list /sys provision`
- C. Via the GUI at `Statistics # Module Statistics # System`
- D. Via the GUI at `System # Resource Provisioning # Module Allocation`

Answer: B,D

Explanation:

Provisioning determines:

- * Which BIG-IP modules are enabled (LTM, ASM, APM, AFM, DNS, etc.)
- * Their provisioning levels (None, Minimal, Nominal, Dedicated)

Two accurate ways to view provisioning settings are:

A). GUI - System # Resource Provisioning # Module Allocation

This is the primary GUI screen showing:

- * All modules
- * Their provisioning level
- * System resource distribution impact

Administrators commonly use this page to confirm or change module provisioning.

D). TMSH - `list /sys provision`

This tmsh command displays each module and its provisioning level:

```
sys provision ltm { level nominal }
sys provision asm { level none }
```

This is the authoritative CLI method for checking module provisioning configurations.

Why the other options are incorrect:

B). `show /sys provision`

- * Shows runtime information but not the actual configuration levels.
- * `list` is the correct command for configuration details.

C). `Statistics # Module Statistics`

- * Shows performance statistics, NOT provisioning status.

Therefore, the correct responses are A and D.

NEW QUESTION # 28

The BIG-IP Administrator needs to update access to the Configuration Utility to include the 172.28.31.0/24 and 172.28.65.0/24 networks.

From the TMOS Shell (tmsh), which command should the BIG-IP Administrator use to complete this task?

- A. `modify /sys httpd allow add { 172.28.31.0/255.255.255.0 172.28.65.0/255.255.255.0 }`
- B. `modify /sys httpd allow add { 172.28.31.0 172.28.65.0 }`
- C. `modify /sys httpd permit add { 172.28.31.0/255.255.255.0 172.28.65.0/255.255.255.0 }`

Answer: A

Explanation:

Access to the BIG-IP Configuration Utility (TMUI) is controlled through the `/sys httpd allow` list.

This list defines which IP addresses or subnets are allowed to connect to the management web interface.

To allow two new subnets - 172.28.31.0/24 and 172.28.65.0/24 - the administrator must add both subnets to the existing list without removing current entries.

In tmsh, subnet entries must be specified in network/netmask format, for example:

172.28.31.0/255.255.255.0

The correct tmsh command to append these networks is:

`modify /sys httpd allow add { 172.28.31.0/255.255.255.0 172.28.65.0/255.255.255.0 }` Why the other options are incorrect:

Option B:

- * IPs are listed without masks, which is invalid for subnet-based access control.

- * The system requires network/netmask format.

Option C:

- * The command uses `permit` instead of `allow`, which is not a valid attribute of `/sys httpd`.
- * The correct keyword must be `allow`.

Thus, only Option A correctly adds both permitted subnets in the proper tmsh format.

NEW QUESTION # 29

A BIG-IP Administrator upgrades the BIG-IP LTM to a newer software version. After the administrator reboots into the new volume, the configuration fails to load.

Why is the configuration failing to load?

- A. Connectivity to the DNS server failed to be established.
- B. The upgrade was performed on the standby unit.
- C. A minimum of at least two reboots is required.
- D. **The license needed to be reactivated before the upgrade.**

Answer: D

Explanation:

When upgrading to a newer TMOS software version, BIG-IP validates whether the current license is permitted to run that version. This is controlled by the `Service Check Date` in the device's license file.

If the Service Check Date is older than the minimum required for the target version:

- * The system boots into the new volume,
- * But fails to load the configuration,
- * And will instead present messages indicating that the configuration cannot be applied due to an invalid or outdated license.

This is a well-known behavior:

An outdated license, not reactivated before upgrade, causes configuration load failure after reboot into the new software.

Why the other options are incorrect:

- A). Performed on the standby unit
 - * Upgrading a standby unit does not cause configuration load failure.
 - * Standby-only upgrades are standard best practice.
- C). Two reboots required
 - * BIG-IP does not require two reboots during an upgrade.
 - * One reboot into the new volume is sufficient.
- D). DNS connectivity failure
 - * DNS connectivity does not affect configuration loading.
 - * DNS is only needed for automatic license activation, not for applying config at boot.

Thus, the configuration failed to load because the license was not reactivated before the upgrade, making Option B correct.

NEW QUESTION # 30

Which command will display the current active volume on a BIG-IP system?

- A. `tmsh show sys version`
- B. **`tmsh show sys software status`**
- C. `tmsh list sys software update`

Answer: B

Explanation:

To identify which boot volume is currently active on a BIG-IP system, the correct command is:

`tmsh show sys software status`

This command displays:

- * All installed boot volumes (HD1.1, HD1.2, HD1.3, etc.)
- * The BIG-IP software version installed on each volume
- * The `Active` field, indicating which volume the system is currently booted from
- * The installation status ("complete", "in-progress", "allowed")

This is the standard and authoritative way to determine the active boot location.

Why the other options are incorrect:

- A). `tmsh show sys version`
 - * Displays OS version, build, and date.

* Does not show boot locations or which volume is active.

C). tmsh list sys software update

* Shows software update configurations, not boot volume status.

* Does not display which volume is active.

NEW QUESTION # 31

Discount is being provided to the customer for the entire F5 F5CAB1 preparation suite. These F5CAB1 learning materials include the F5CAB1 preparation software & PDF files containing sample Interconnecting F5 F5CAB1 and answers along with the free 90 days updates and support services. We are facilitating the customers for the F5 F5CAB1 preparation with the advanced preparatory tools.

F5CAB1 Dumps Download: <https://www.actual4cert.com/F5CAB1-real-questions.html>