


International Code Council Vce Fire-Inspector-II Free: 67 - Fire Inspector II Exam - TestBraindump Fast Download

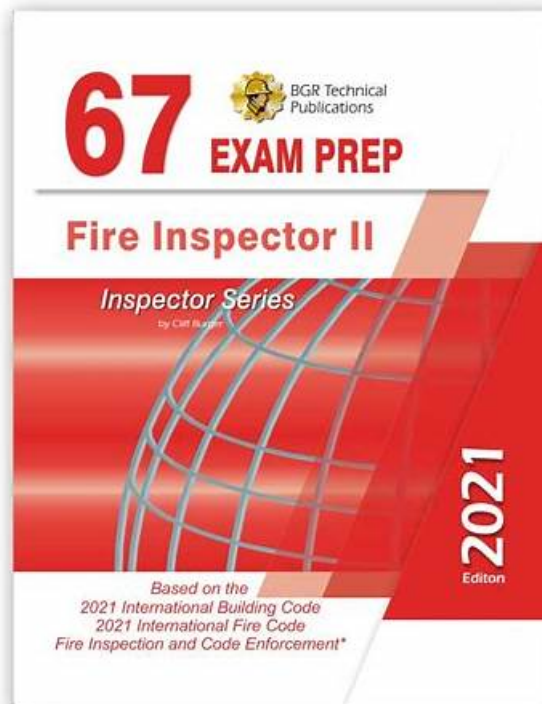

DOWNLOAD the newest TestBraindump Fire-Inspector-II PDF dumps from Cloud Storage for free:
<https://drive.google.com/open?id=1du7NqHh09ufmWdH0V2iK5dcfjy3dVQB>

With our Fire-Inspector-II test prep, you don't have to worry about the complexity and tediousness of the operation. Our Fire-Inspector-II exam torrent is available in different versions. Whether you like to study on a computer or enjoy reading paper materials, our test prep can meet your needs. Our PDF version of the Fire-Inspector-II quiz guide is available for customers to print. You can print it out, so you can practice it repeatedly conveniently. And our Fire-Inspector-II Exam Torrent make it easy for you to take notes on it so that your free time can be well utilized and you can often consolidate your knowledge. Everything you do will help you successfully pass the exam and get the card.

You may now download the Fire-Inspector-II PDF documents in your smart devices and lug it along with you. You can effortlessly yield the printouts of Fire-Inspector-II exam study material as well, PDF files make it extremely simple for you to switch to any topics with a click. While the Practice Software creates is an actual test environment for your Fire-Inspector-II Certification Exam. All the preparation material reflects latest updates in Fire-Inspector-II certification exam pattern.

>> Vce Fire-Inspector-II Free <<

Perfect Vce Fire-Inspector-II Free - Pass Fire-Inspector-II Exam

The TestBraindump International Code Council Fire-Inspector-II exam dumps are ready for quick download. Just choose the right TestBraindump International Code Council Fire-Inspector-II exam questions format and download it after paying an affordable TestBraindump 67 - Fire Inspector II Exam (Fire-Inspector-II) practice questions charge and start this journey. Best of luck in International Code Council Fire-Inspector-II exam and career!!!

International Code Council 67 - Fire Inspector II Exam Sample Questions (Q45-Q50):

NEW QUESTION # 45

Horizontal exits shall not comprise more than ____ of the required exits from any floor area in a Group I-2 occupancy.

- A. 3/4
- B. 2/3
- C. 1/3
- D. 1/2

Answer: D

Explanation:

For Group I-2 occupancies (such as hospitals, nursing homes, and similar healthcare facilities), horizontal exits are used to improve fire safety by allowing occupants to move to a safer area without using stairs or elevators.

IFC 2021, Section 1026.1 (Horizontal Exits - General Requirements) states that:

Horizontal exits shall not comprise more than one-half (1/2) of the required exits from any floor area in a Group I-2 occupancy. This ensures that at least 50% of the required exits remain traditional vertical or exterior exits, maintaining a balance between horizontal and traditional egress routes.

Correct answer: B. 1/2

NEW QUESTION # 46

Fire inspectors receiving citizen complaints about a building should first:

- A. inform the owner of the building that a complaint has been filed against him
- B. investigate the history of the building.
- C. record all pertinent information.
- D. forward the complaint to the senior inspector.

Answer: C

Explanation:

Reference to Fire Inspection Procedures for Handling Complaints:

According to the International Fire Code (IFC 2021), Section 104.11, fire inspectors are responsible for investigating complaints regarding fire hazards or code violations.

The first step in responding to a citizen complaint is to record all pertinent information about the issue.

2. Steps in Handling a Fire Safety Complaint:

Step 1: Record detailed information about the complaint, including:

Complainant's name and contact information (if available).

Address and description of the building.

Nature of the alleged fire hazard or code violation.

Step 2: Verify the history of past violations (if necessary).

Step 3: Conduct an inspection to determine if a violation exists.

Step 4: Take appropriate enforcement action, if needed.

3. Clarification of Incorrect Answer Choices:

B: Investigate the history of the building # Incorrect

While past violations can provide context, the first step is to record the details of the current complaint before investigating further.

C: Forward the complaint to the senior inspector # Incorrect

Inspectors do not need to escalate every complaint immediately; instead, they should gather relevant information first.

D: Inform the owner of the building that a complaint has been filed against him # Incorrect Not all complaints result in violations, and notifying the owner prematurely may lead to unnecessary disputes or conflicts.

The inspector should first verify the validity of the complaint before notifying the owner.

4. Conclusion:

The correct and verified answer is A (record all pertinent information) as per IFC 104.11 and fire inspection best practices.

NEW QUESTION # 47

What fire-resistance rating is required for interior nonbearing wall and partitions in Type IV construction?

- A. 2 hours
- B. 0 hours
- C. 1 hour
- D. 1-1/2 hours

Answer: B

Explanation:

The fire-resistance rating requirements for different building elements in Type IV (Heavy Timber) construction are specified in the 2021 International Building Code (IBC), Table 601 - Fire-Resistance Rating Requirements for Building Elements (Hours).

IBC Table 601 - Fire Resistance for Type IV Construction:

Interior nonbearing walls and partitions in Type IV construction require 0 hours of fire resistance.

This is because Type IV construction primarily relies on large, heavy timber elements that provide inherent fire resistance.

Why Other Options Are Incorrect?

B). 1 hour - Incorrect, as nonbearing interior walls in Type IV construction are not required to have a fire- resistance rating.

C). 1-1/2 hours - Not required by code.

D). 2 hours - Only structural elements like exterior walls in some cases may require fire resistance, but nonbearing interior partitions do not.

Correct answer: A. 0 hours

NEW QUESTION # 48

Given: A nonsprinklered commercial Type II-B building has a fire flow requirement of 7,000 gpm. If a sprinkler system is installed throughout the building, the new required fire flow is at least ____ gpm. (Assume that the new required fire flow is sufficient to meet the requirements of the sprinkler system.)

- A. 2,000
- B. 2,250
- C. 1,750
- **D. 1,500**

Answer: D

Explanation:

IFC Section 903.3.5 and Appendix B (Fire-Flow Requirements) allow a reduction in fire flow when sprinklers are installed. For a Type II-B building (noncombustible, unprotected), the base fire flow (7,000 gpm) reflects a large, unsprinklered structure (e.g., per Table B105.1(2)). With full sprinkler protection, IFC B105.2 permits a reduction to as low as 25% of the original flow or the sprinkler demand (whichever is greater), typically

1,500 gpm for commercial buildings per NFPA 13 standards, assuming adequate water supply. Options B, C, and D exceed this minimum without justification. Thus, A is correct.

NEW QUESTION # 49

Smoking is not permitted within ____ ft. of a transfer point for LP-gas while filling operations are in progress.

- A. 0
- B. 1
- **C. 2**
- D. 3

Answer: C

Explanation:

Smoking Restrictions Near LP-Gas Transfer Points

According to the International Fire Code (IFC) 2021, Section 3807.2, smoking is not permitted within 25 feet of an LP-gas transfer point while filling operations are in progress.

This prevents ignition hazards, as LP-gas is highly flammable and can ignite from cigarettes, matches, or lighters.

2. Why 25 Feet is the Correct Answer

LP-gas vapors are heavier than air and can travel significant distances before igniting.

The 25-foot clearance requirement is set to prevent accidental ignition due to an undetected vapor leak.

3. Verification of Other Options

Option A (10 feet) - Incorrect, as this is the requirement for smaller propane cylinder storage areas, not transfer points.

Option B (15 feet) - Incorrect, as IFC mandates a 25-foot minimum clearance.

Option D (50 feet) - Incorrect, as the IFC requirement is specifically 25 feet, not 50.

Reference Sources:

International Fire Code (IFC) 2021 - Section 3807.2 (Smoking Prohibitions Near LP-Gas Transfer Points) NFPA 58: Liquefied Petroleum Gas Code (Safe Handling and Transfer Requirements) ICC Fire Inspector II Study Guide (2021) Thus, the correct and verified answer is: C. 25 feet. #

myportal.utt.edu.tt, myportal.utt.edu.tt, www.stes.tyc.edu.tw, www.stes.tyc.edu.tw, myportal.utt.edu.tt, myportal.utt.edu.tt,
myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt,
myportal.utt.edu.tt, myportal.utt.edu.tt, pink88.cc, pastebin.com, www.stes.tyc.edu.tw, Disposable vapes

2026 Latest TestBraindump Fire-Inspector-II PDF Dumps and Fire-Inspector-II Exam Engine Free Share:
<https://drive.google.com/open?id=1du7NqHh09ufmWdH0V2iK5dcfjy3dVQB>