


3V0-41.22 test braindumps: Advanced Deploy VMware NSX-T Data Center 3.X & 3V0-41.22 testking PDF

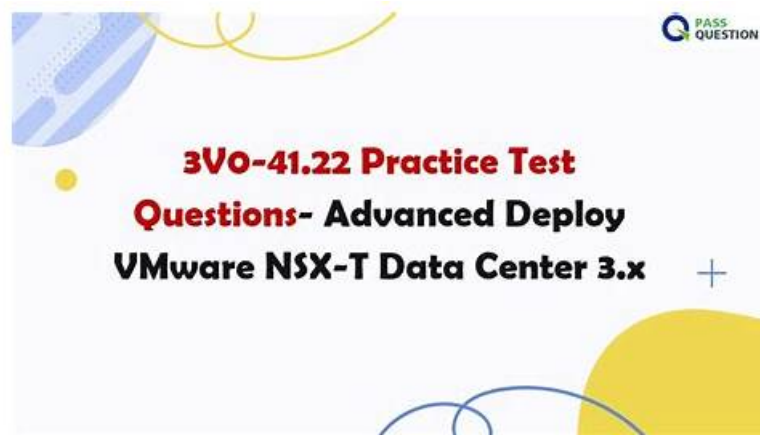

BONUS!!! Download part of Exam4Docs 3V0-41.22 dumps for free: https://drive.google.com/open?id=1-GRlxbKB7G0w_Mkmm_2MWK5VZNt6jV8j

We are a leading corporation in this line handling 3V0-41.22 study questions well with passing rate up to 98 and over percent, which is an unreachable goal for others. So our 3V0-41.22 preparation exam enjoys good sales for the excellent quality and reasonable prices in recent years. And we are so sure that we can serve you even better than you can imagine with our 3V0-41.22 learning guide since we are keeping on doing a better job in this career.

How to Prepare the VMware 3V0-41.22 Certification

Certification Questions provides **VMware 3V0-41.22 Dumps** are the best way to pass VMware 3V0-41.22 exam. If you are struggling to clear the 3V0-41.22 exam then this guide will help you to prepare for the VMware 3V0-41.22 exam in an easy way. 3V0-41.22 practice test is a kind of exam dumps which contains almost all the questions of the VMware 3V0-41.22 exam. All the questions and answers are explained in detail in this guide and you can save your precious time and money by using it. If you want to pass the VMware 3V0-41.22 exam in the first attempt then you need to follow this guide. It will help you to get a good score in the VMware 3V0-41.22 exam and you can also use the latest version of VMware 3V0-41.22 exam questions.

Purchase the 3V0-41.22 simulator and start preparing for the VMware 3V0-41.22 exam. If you don't have enough time to prepare then you can buy the 3V0-41.22 Practice Test from our website. You will get the opportunity to test your preparation before the actual date of the VMware 3V0-41.22 exam. The VMware 3V0-41.22 preparation test are the best source to get a good score in the VMware 3V0-41.22 exam. You will be able to get more than 90% of the questions in your exam paper and you can also get the answers to all the questions. The questions and answers of the VMware 3V0-41.22 exam are available in the 3V0-41.22 exam in PDF format and the interface is very simple and easy to understand.

This guide will help you to prepare for the VMware 3V0-41.22 exam. You will get all the details regarding the VMware 3V0-41.22 exam and you will know how to prepare for this exam. The VMware 3V0-41.22 exam dumps are the best source to prepare for the VMware 3V0-41.22 exam and you can easily pass this exam. 3V0-41.22 practice test is a free source to prepare for the VMware 3V0-41.22 exam.

>> **3V0-41.22 Exams Collection** <<

Realistic 3V0-41.22 Exams Collection - 100% Pass 3V0-41.22 Exam

If you are confusing while preparing for your test, you can choose to trust our information resource and experienced experts rather than waste a lot of time on learning aimlessly. Our VMware 3V0-41.22 exam guide materials are edited by professional experts based on latest and exact information about the real test. Generally the passing rate is high up to 99.79%. If you want to pass exam as soon as possible, our 3V0-41.22 Exam Guide Materials will be most useful product for you.

VMware 3V0-41.22 Certification is ideal for professionals who want to demonstrate their expertise in NSX-T Data Center 3.X deployment and management. Advanced Deploy VMware NSX-T Data Center 3.X certification validates the candidate's ability to

design, deploy, and manage NSX-T Data Center 3.X solutions. Advanced Deploy VMware NSX-T Data Center 3.X certification is also useful for professionals who want to enhance their career prospects and increase their earning potential.

VMware Advanced Deploy VMware NSX-T Data Center 3.X Sample Questions (Q15-Q20):

NEW QUESTION # 15

SIMULATION

Task 16

You are working to automate your NSX-T deployment and an automation engineer would like to retrieve your BOP routing information from the API.

You need to:

- * Run the GET call in the API using Postman
- * Save output to the desktop to a text file called API.txt

Complete the requested task.

Notes: Passwords are contained in the user _readme.txt. This task is not dependent on another. This task should take approximately 5 minutes to complete.

Answer:

Explanation:

See the Explanation part of the Complete Solution and step by step instructions Explanation:

To run the GET call in the API using Postman and save the output to the desktop to a text file called API.txt, you need to follow these steps:

Open Postman and create a new request tab. Select GET as the method from the drop-down menu.

Enter the URL of the NSX-T Policy API endpoint for retrieving the BGP routing table, such as `https://<nsx-manager-ip-address>/policy/api/v1/infra/tier-0s/vmc/routing-table?enforcement_point_path=/infra/sites/default/enforcement-points/vmc-enforcementpoint` Click the Authorization tab and select Basic Auth as the type from the drop-down menu. Enter your NSX-T username and password in the Username and Password fields, such as admin and VMware1!.

Click Send to execute the request and view the response in the Body tab. You should see a JSON object with the BGP routing table information, such as routes, next hops, prefixes, etc.

Click Save Response and select Save to a file from the drop-down menu. Enter API.txt as the file name and choose Desktop as the location. Click Save to save the output to your desktop.

You have successfully run the GET call in the API using Postman and saved the output to your desktop to a text file called API.txt.

NEW QUESTION # 16

SIMULATION

Task 10

You have been notified by the Web Team that they cannot get to any northbound networks from their Tampa web servers that are deployed on an NSX-T network segment. The Tampa web VM's however can access each other.

You need to:

- * Troubleshoot to find out why the Tampa web servers cannot communicate to any northbound networks and resolve the issue.

Complete the requested task. TO verify your work. ping the Control Center @ 192.168.110.10 Notes: Passwords are contained in the user_readme.txt. This task is dependent on Task 4. Some exam candidates may have already completed this task if they had done more than the minimum required in Task 4. This task should take approximately 15 minutes to complete.

Answer:

Explanation:

See the Explanation part of the Complete Solution and step by step instructions Explanation:

To troubleshoot why the Tampa web servers cannot communicate to any northbound networks, you need to follow these steps:

Log in to the NSX Manager UI with admin credentials. The default URL is `https://<nsx-manager-ip-address>`.

Navigate to Networking > Tier-0 Gateway and select the tier-0 gateway that connects the NSX-T network segment to the northbound networks. For example, select T0-GW-01.

Click Interfaces > Set and verify the configuration details of the interfaces. Check for any discrepancies or errors in the parameters such as IP address, subnet mask, MTU, etc.

If you find any configuration errors, click Edit and modify the parameters accordingly. Click Save to apply the changes.

If you do not find any configuration errors, check the connectivity and firewall rules between the tier-0 gateway and the northbound networks. You can use ping or traceroute commands from the NSX Edge CLI or the vSphere Web Client to test the connectivity.

You can also use show service router command to check the status of the routing service on the NSX Edge.

If you find any connectivity or firewall issues, resolve them by adjusting the network settings or firewall rules on the NSX Edge or the northbound devices.

After resolving the issues, verify that the Tampa web servers can communicate to any northbound networks by pinging the Control Center @ 192.168.110.10 from one of the web servers.

NEW QUESTION # 17

Task 7

you are asked to create a custom QoS profile to prioritize the traffic on the phoenix-VLAN segment and limit the rate of ingress traffic.

You need to:

* Create a custom QoS profile for the phoenix-VLAN using the following configuration detail:

• Create a custom QoS profile for the phoenix-VLAN using the following configuration detail:	
Name:	ingress-phoenix-qos-profile
Priority:	0
Class of Service:	0
Ingress traffic rate limits:	100 Mbps for average, 200 Mbps for peak

* Apply the profile on the 'phoenix-VLAN' segment

Complete the requested task.

Notes: Passwords are contained in the user_readme.txt.

take approximately 5 minutes to complete.

Subsequent tasks may require the completion of this task.

This task should See the Explanation part of the Complete Solution and step by step instructions.

Answer:

Explanation:

Explanation

To create a custom QoS profile to prioritize the traffic on the phoenix-VLAN segment and limit the rate of ingress traffic, you need to follow these steps:

Log in to the NSX Manager UI with admin credentials. The default URL is

<https://<nsx-manager-ip-address>>.

Navigate to Networking > Segments > Switching Profiles and click Add Switching Profile. Select QoS as the profile type.

Enter a name and an optional description for the QoS profile, such as phoenix-QoS.

In the Mode section, select Untrusted as the mode from the drop-down menu. This will allow you to set a custom DSCP value for the outbound IP header of the traffic on the segment.

In the Priority section, enter 46 as the DSCP value. This will mark the traffic with Expedited Forwarding (EF) per-hop behavior, which is typically used for high-priority applications such as voice or video.

In the Class of Service section, enter 5 as the CoS value. This will map the DSCP value to a CoS value that can be used by VLAN-based logical ports or physical switches to prioritize the traffic.

In the Ingress section, enter 1000000 as the Average Bandwidth in Kbps. This will limit the rate of inbound traffic from the VMs to the logical network to 1 Mbps.

Optionally, you can also configure Peak Bandwidth and Burst Size settings for the ingress traffic, which will allow some burst traffic above the average bandwidth limit for a short duration.

Click Save to create the QoS profile.

Navigate to Networking > Segments and select the phoenix-VLAN segment that you want to apply the QoS profile to.

Click Actions > Apply Profile and select phoenix-QoS as the switching profile that you want to apply to the segment.

Click Apply to apply the profile to the segment.

You have successfully created a custom QoS profile and applied it to the phoenix-VLAN segment.

NEW QUESTION # 18

SIMULATION

Task 2

You are asked to deploy three Layer 2 overlay-backed segments to support a new 3-tier app and one Layer 2 VLAN-backed segment for support of a legacy application. The logical segments must block Server DHCP requests. Ensure three new overlay-backed segments and one new VLAN-backed logical segment are deployed to the RegionA01-COPMOI compute cluster. All configuration should be done utilizing the NSX UI.

You need to:

• Configure a new segment security profile to block DHCP requests. All other segment security features should be disabled. Use the following configuration detail:	
Name:	DHCP-block
DHCP:	DHCP server block enabled

• Configure a new overlay backed segment for Web server with the following configuration detail:	
Name:	LAX-web
Segment security policy:	DHCP-block
Transport Zone:	TZ-Overlay-1

• Configure a new overlay backed segment for DB server with the following configuration detail:	
Name:	LAX-db
Segment security policy:	DHCP-block
Transport Zone:	TZ-Overlay-1

• Configure a new VLAN backed segment for legacy server with the following configuration detail:	
Name:	Phoenix-VLAN
VLAN ID:	0
Segment security policy:	DHCP-block
Transport Zone:	TZ-VLAN-1

• Configure a new VLAN backed segment for Edge uplink with the following configuration detail:	
Name:	Uplink
VLAN ID:	0
Segment security policy:	DHCP-block
Transport Zone:	TZ-Uplink

Complete the requested task.

Notes: Passwords are contained in the user_readme.txt. Task 2 is dependent on the completion of Task 1. Other tasks are dependent on completion of this task. You may want to move to the next tasks while waiting for configuration changes to be applied. This task should take approximately 10 minutes to complete.

Answer:

Explanation:

See the Explanation part of the Complete Solution and step by step instructions Explanation:

To deploy three layer 2 overlay-backed segments and one layer 2 VLAN-backed segment, you need to follow these steps:

Log in to the NSX Manager UI with admin credentials. The default URL is <https://<nsx-manager-ip-address>>.

Navigate to Networking > Segments and click Add Segment.

Enter a name for the segment, such as Web-01.

Select Tier-1 as the connectivity option and choose an existing tier-1 gateway from the drop-down menu or create a new one by clicking New Tier-1 Gateway.

Enter the gateway IP address of the subnet in a CIDR format, such as 192.168.10.1/24.

Select an overlay transport zone from the drop-down menu, such as Overlay-TZ.

Optionally, you can configure advanced settings such as DHCP, Metadata Proxy, MAC Discovery, or QoS for the segment by clicking Set Advanced Configs.

Click Save to create the segment.

Repeat steps 2 to 8 for the other two overlay-backed segments, such as App-01 and DB-01, with different subnet addresses, such as 192.168.20.1/24 and 192.168.30.1/24.

To create a VLAN-backed segment, click Add Segment again and enter a name for the segment, such as Legacy-01.

Select Tier-0 as the connectivity option and choose an existing tier-0 gateway from the drop-down menu or create a new one by clicking New Tier-0 Gateway.

Enter the gateway IP address of the subnet in a CIDR format, such as 10.10.10.1/24.

Select a VLAN transport zone from the drop-down menu, such as VLAN-TZ, and enter the VLAN ID for the segment, such as 100.

Optionally, you can configure advanced settings such as DHCP, Metadata Proxy, MAC Discovery, or QoS for the segment by clicking Set Advanced Configs.

Click Save to create the segment.

To apply a segment security profile to block DHCP requests on the segments, navigate to Networking > Segments > Segment Profiles and click Add Segment Profile.

Select Segment Security as the profile type and enter a name and an optional description for the profile.

Toggle the Server Block and Server Block - IPv6 buttons to enable DHCP filtering for both IPv4 and IPv6 traffic on the segments that use this profile.

Click Save to create the profile.

Navigate to Networking > Segments and select the segments that you want to apply the profile to.

Click Actions > Apply Profile and select the segment security profile that you created in step 18.

Click Apply to apply the profile to the selected segments.

You have successfully deployed three layer 2 overlay-backed segments and one layer 2 VLAN-backed segment with DHCP filtering using NSX-T Manager UI.

NEW QUESTION # 19

Task 8

You are tasked With troubleshooting the NSX IPSec VPN service Which has been reported down. Verify the current NSX configuration is deployed and resolve any issues.

You need to:

* Verify the present configuration as provided below:

NSX IPSec Session Name	
Remote IP:	192.168.140.2
Local Networks:	10.10.10.0/24
Remove Networks:	10.10.20.0/24
Pre-shared Key:	VMware!!VMware!!

Complete the requested task.

Notes: Passwords are contained in the user_readme.txt. This task is not dependent on another. This task Should take approximately 15 minutes to complete.

Answer:

Explanation:

See the Explanation part of the Complete Solution and step by step instructions.

Explanation

To troubleshoot the NSX IPSec VPN service that has been reported down, you need to follow these steps:

Log in to the NSX Manager UI with admin credentials. The default URL is

<https://<nsx-manager-ip-address>>.

Navigate to Networking > VPN > IPSec VPN and select the IPSec VPN session that is down. You can identify the session by its name, local endpoint, remote endpoint, and status.

Click Show IPSec Statistics and view the details of the IPSec VPN session failure. You can see the error message, the tunnel state, the IKE and ESP status, and the statistics of the traffic sent and received.

Compare the configuration details of the IPSec VPN session with the expected configuration as provided below. Check for any discrepancies or errors in the parameters such as local and remote endpoints, local and remote networks, IKE and ESP profiles, etc.

If you find any configuration errors, click Actions > Edit and modify the parameters accordingly. Click Save to apply the changes.

If you do not find any configuration errors, check the connectivity and firewall rules between the local and remote endpoints. You can use ping or traceroute commands from the NSX Edge CLI to test the connectivity. You can also use show service ipsec command to check the status of IPSec VPN service on the NSX Edge.

If you find any connectivity or firewall issues, resolve them by adjusting the network settings or firewall rules on the NSX Edge or the third-party device.

After resolving the issues, verify that the IPSec VPN session is up and running by refreshing the IPSec VPN page on the NSX Manager UI. You can also use show service ipsec sp and show service ipsec sa commands on the NSX Edge CLI to check the status of security policy and security association for the IPSec VPN session.

NEW QUESTION # 20

.....

New Guide 3V0-41.22 Files: <https://www.exam4docs.com/3V0-41.22-study-questions.html>

- Excellent 3V0-41.22 Exams Collection Help You to Get Acquainted with Real 3V0-41.22 Exam Simulation ☐ Go to website (www.dumpsquestion.com) open and search for { 3V0-41.22 } to download for free ☐ 3V0-41.22 Exam Collection
- Test 3V0-41.22 Practice ☐ Certification 3V0-41.22 Exam Infor ☐ 3V0-41.22 Latest Learning Materials ☐ Easily obtain free download of ▶ 3V0-41.22 ◀ by searching on ⇒ www.pdfvce.com ⇐ ☐ 3V0-41.22 Study Reference
- 2025 3V0-41.22 Exams Collection - Latest VMware New Guide 3V0-41.22 Files: Advanced Deploy VMware NSX-T Data Center 3.X ☐ Enter ➡ www.getvalidtest.com ☐ and search for ☀ 3V0-41.22 ☀ ☐ to download for free ☐ ☐ New 3V0-41.22 Study Notes
- New 3V0-41.22 Test Forum ☐ Training 3V0-41.22 Tools ☐ Exam 3V0-41.22 Consultant ☐ Easily obtain ☐ 3V0-

[illegible]

What's more, part of that Exam4Docs 3V0-41.22 dumps now are free: https://drive.google.com/open?id=1-GRxbKB7G0w_Mkmm_2MWK5VZNt6jV8j