


JN0-664최고덤프데모 & JN0-664최신버전시험대비자료

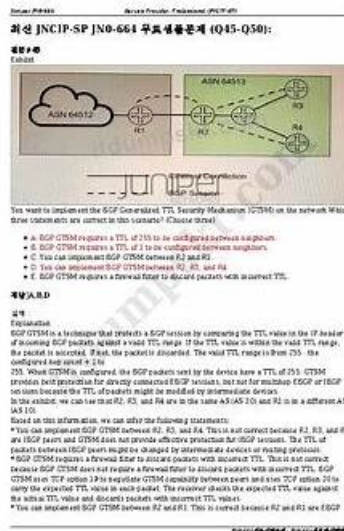

그리고 DumpTOP JN0-664 시험 문제집의 전체 버전을 클라우드 저장소에서 다운로드할 수 있습니다:
<https://drive.google.com/open?id=1634JuPcV76rC8sDUrHQ4WWxdy8Yn2TI5>

Juniper인증 JN0-664시험에 도전하고 싶으시다면 최강 시험패스율로 유명한DumpTOP의 Juniper인증 JN0-664덤프로 시험공부를 해보세요. 시간절약은 물론이고 가격도 착해서 간단한 시험패스에 딱 좋은 선택입니다. Juniper 인증 JN0-664시험출제경향을 완벽하게 연구하여DumpTOP에서는Juniper 인증JN0-664시험대비덤프를 출시하였습니다. DumpTOP제품은 고객님의 IT자격증 취득의 앞길을 환히 비추어드립니다.

Juniper JN0-664 (Service Provider, Professional (JNCIP-SP)) 자격증 시험은 Juniper Networks의 서비스 제공자 라우팅 및 스위칭 기술을 구현, 구성 및 문제 해결하는 전문가 수준의 자격증 시험입니다. 이 자격증 시험은 서비스 제공자 분야에서 기술과 지식을 검증하고자 하는 네트워크 엔지니어, 네트워크 관리자 및 기타 IT 전문가들에게 이상적입니다.

>> JN0-664최고덤프데모 <<

Juniper JN0-664최신버전 시험대비자료, JN0-664시험대비 덤프데모

많은 분들은Juniper JN0-664인증시험이 아주 어려운 것은 알고 있습니다. 하지만 우리DumpTOP를 선택함으로 Juniper JN0-664인증시험은 그렇게 어렵지 않다는 것을 알게 될 것입니다. Pass4Tes의Juniper JN0-664합습가이드는

시험의 예상문제부터 전면적으로 만들어진 아주 퍼펙트한 시험자료입니다. 우리의 서비스는 Juniper JN0-664 구매 후 최신버전이 업데이트 시 최신문제와 답을 모두 무료로 제공합니다.

최신 JNCIP-SP JN0-664 무료샘플문제 (Q34-Q39):

질문 # 34

Exhibit.

Referring to the exhibit; the 10.0.0.0/24 EBGp route is received on R5; however, the route is being hidden.

What are two solutions that will solve this problem? (Choose two.)

- A. Add the internal interface prefix to the BGP routing tables.
- B. Add the external interface prefix to the IGP routing tables
- C. On R4, create a policy to change the BGP next hop to 172.16.1.1 and apply it to IBGP as an export policy
- D. On R4, create a policy to change the BGP next hop to itself and apply it to IBGP as an export policy

정답: B,D

설명:

Explanation

the default behavior for iBGP is to propagate EBGp-learned prefixes without changing the next-hop. This can cause issues if the next-hop is not reachable via the IGP. One solution is to use the next-hop self command on R4, which will change the next-hop attribute to its own loopback address. This way, R5 can reach the next-hop via the IGP and install the route in its routing table.

Another solution is to add the external interface prefix (120.0.4.16/30) to the IGP routing tables of R4 and R5.

This will also make the next-hop reachable via the IGP and allow R5 to use the route. According to 2, this is a possible workaround for a pure IP network, but it may not work well for an MPLS network.

질문 # 35

A router running IS-IS is configured with an ISO address of 49.0001.00a0.c96b.c490.00.

Which part of this address is the system ID?

- A. 0001.00a0.c96b.c490 is the system identifier.
- B. c96b.c490 is the system identifier.
- C. c490 is the system identifier.
- D. 00a0.c96b.c490 is the system identifier.

정답: D

설명:

In IS-IS (Intermediate System to Intermediate System) routing, each router is identified by a unique ISO (International Organization for Standardization) address, also known as a Network Entity Title (NET). The NET consists of three parts:

1. ****Area Identifier****: Indicates the area to which the router belongs.
2. ****System Identifier****: Uniquely identifies the router within the area.
3. ****NSAP Selector (NSEL)****: Typically set to 00 for a router, indicating the Network Service Access Point.

The format of the ISO address is '49.XXXX.YYYY.YYYY.ZZZZ.ZZZZ.00', where:

- '49' is the AFI (Authority and Format Identifier) indicating a private address.
- 'XXXX' is the Area Identifier.
- 'YYYY.YYYY.YYYY' is the System Identifier.
- 'ZZZZ.ZZZZ' is the NSAP Selector.

Given the address '49.0001.00a0.c96b.c490.00':

- ****Area Identifier****: '49.0001'
- ****System Identifier****: '00a0.c96b.c490'
- ****NSAP Selector****: '00'

****Explanation****:

- ****A. 00a0.c96b.c490 is the system identifier****:
- Correct. The System Identifier in an ISO address is a 48-bit (6-byte) field used to uniquely identify the router. In this address, '00a0.c96b.c490' is the correct 6-byte System Identifier.
- ****B. 0001.00a0.c96b.c490 is the system identifier****:
- Incorrect. This includes the Area Identifier as part of the System Identifier, which is not correct.
- ****C. c96b.c490 is the system identifier****:
- Incorrect. This is only part of the System Identifier. The full System Identifier must be 6 bytes long.

- **D. c490 is the system identifier**:

- Incorrect. This is an incomplete and incorrect part of the System Identifier.

Conclusion:

The correct part of the address that represents the System Identifier is:

A. 00a0.c96b.c490 is the system identifier.

References:

- Juniper Networks Documentation on IS-IS: [IS-IS Configuration](https://www.juniper.net/documentation/en_US/junos/topics/task/configuration/isis-configuring.html)

- ISO/IEC 10589, the IS-IS routing protocol standard.

질문 # 36

You are troubleshooting the connection between AS 64496 and AS 64497 and notice that only one of the paths is being used for traffic forwarding.

Referring to the exhibit, which three actions will ensure that R1 is configured properly for load balancing BGP routes? (Choose three.)

- A. Verify that the multipath option is configured under protocols bgp on R1.
- B. Verify that there is a load balancing export policy under routing-options for the received BGP routes on R1.
- C. Verify that the multipath option is configured under protocols bgp on both R2 and R3.
- D. Verify that an import load balancing policy exists under protocols bgp for the received BGP routes on R1.
- E. Verify that the routing table on R1 has BGP routes for 203.0.113.128/25 with multiple next hops.

정답: A,B,E

질문 # 37

Which two statements are correct about VPLS tunnels? (Choose two.)

- A. LDP-signaled VPLS tunnels only support control bit 0.
- B. LDP-signaled VPLS tunnels use auto-discovery to provision sites.
- C. BGP-signaled VPLS tunnels can use either RSVP or LDP between the PE routers.
- D. BGP-signaled VPLS tunnels require manual provisioning of sites.

정답: A,C

질문 # 38

Exhibit.

Referring to the exhibit, which path would traffic passing through R1 take to get to R4?

- A. R1 -> R3 -> R4
- B. R1 -> R2 -> R4
- C. R1 -> R2 -> R3 -> R4
- D. R1 -> R4

정답: B

설명:

The OSPF cost is carried in the LSAs that are exchanged within an OSPF area. When a router calculates the cost to a destination it uses the cost of the exit interface of each router in the path to the destination.

질문 # 39

.....

최근 더욱 많은 분들이 Juniper 인증 JN0-664 시험에 도전해보려고 합니다. DumpTOP에서는 여러분의 시간과 돈을 절약해드리기 위하여 저렴한 가격에 최고의 품질을 지닌 퍼펙트한 Juniper 인증 JN0-664 시험덤프를 제공해드리고 고객님의 시험준비에 편안함을 선물해드립니다. DumpTOP 제품을 한번 믿어보세요.

DumpTOP JN0-664 최신 PDF 버전 시험 문제집을 무료로 Google Drive에서 다운로드하세요:
<https://drive.google.com/open?id=1634JuPcV76rC8sDuRHQ4WWxdy8Yn2TI5>