

NCM-MCI Valid Exam Objectives, NCM-MCI Reliable Braindumps Sheet



NCM-MCI Exam Details

Exam Name	Nutanix Certified Master - Multicloud Infrastructure
Exam Code	NCM-MCI
Exam Price	\$299 USD
Duration	180 minutes
Number of Questions	16-20
Passing Score	3000/1000-6000
Recommended Training / Books	Advanced Administration & Performance Management (AAPM) v6.5
Schedule Exam	Nutanix
Sample Questions	Nutanix NCM-MCI Sample Questions
Recommended Practice	Nutanix Certified Master - Multicloud Infrastructure (NCM-MCI) Practice Test

BONUS!!! Download part of ActualVCE NCM-MCI dumps for free: <https://drive.google.com/open?id=1mMcuAMZ6A1gvrXJ2mJHIAABsZrYh7cF>

We are famous for our company made these NCM-MCI exam questions with accountability. We understand you can have more chances getting higher salary or acceptance instead of preparing for the NCM-MCI exam. Our NCM-MCI practice materials are made by our responsible company which means you can gain many other benefits as well. We offer free demos of our NCM-MCI learning guide for your reference, and send you the new updates if our experts make them freely.

As is known to us, the high pass rate is a reflection of the high quality of NCM-MCI study torrent. There are more than 98 percent that passed their exam, and these people both used our NCM-MCI test torrent. There is no doubt that our NCM-MCI guide torrent has a higher pass rate than other study materials. We deeply know that the high pass rate is so important for all people, so we have been trying our best to improve our pass rate all the time. Now our pass rate has reached 99 percent. If you choose our NCM-MCI study torrent as your study tool and learn it carefully,

>> NCM-MCI Valid Exam Objectives <<

NCM-MCI Valid Exam Objectives Makes Passing Nutanix Certified Master - Multicloud Infrastructure v6.10 More Convenient

Developing your niche is very easy in the presence of the NCM-MCI dumps. The credentials are not very difficult to achieve because like NCM-MCI the acclaimed vendors are highly successful in the industry. If you need a boost in your career, then ActualVCE is the site you have to opt for taking NCM-MCI Certification exams. Some of the vital features of the NCM-MCI

dumps of ActualVCE are given below. NCM-MCI dumps are the most verified and authentic braindumps that are used to pass the NCM-MCI certification exam. The whole NCM-MCI study material is approved by the expert.

Do you want to pass the Nutanix NCM-MCI Exam?

The Nutanix NCM-MCI exam questions are available in different formats. You can either take Nutanix NCM-MCI practice test at a web based platform, or you can purchase for the Nutanix NCM-MCI practice test software. If you feel that you can learn better by training than you can go for the **Nutanix NCM-MCI exam dumps**. However, if you feel that practicing is the best mode of learning then you can go for the Nutanix NCM-MCI Training Tools.

It is to be noted that the Nutanix NCM-MCI exam objective may change anytime, and we highly recommend you to keep visiting this site on regular basis so that you do not miss any update.

Nutanix has always been known as one of the leading providers in information technology sector. The professionals who wish to make their career in IT industry must have to pass the Nutanix NCM-MCI exam questions because they are highly recognized by all IT companies.

Nutanix Certified Master - Multicloud Infrastructure v6.10 Sample Questions (Q15-Q20):

NEW QUESTION # 15

Task 11

An administrator has noticed that after a host failure, the SQL03 VM was not powered back on from another host within the cluster. The Other SQL VMs (SQL01, SQL02) have recovered properly in the past.

Resolve the issue and configure the environment to ensure any single host failure affects a minimal number of SQL VMs.

Note: Do not power on any VMs

Answer:

Explanation:

See the Explanation for step by step solution

Explanation:

One possible reason why the SQL03 VM was not powered back on after a host failure is that the cluster was configured with the default (best effort) VM high availability mode, which does not guarantee the availability of VMs in case of insufficient resources on the remaining hosts. To resolve this issue, I suggest changing the VM high availability mode to guarantee (reserved segments), which reserves some memory on each host for failover of VMs from a failed host. This way, the SQL03 VM will have a higher chance of being restarted on another host in case of a host failure.

To change the VM high availability mode to guarantee (reserved segments), you can follow these steps:

Log in to Prism Central and select the cluster where the SQL VMs are running.

Click on the gear icon on the top right corner and select Cluster Settings.

Under Cluster Services, click on Virtual Machine High Availability.

Select Guarantee (Reserved Segments) from the drop-down menu and click Save.

To configure the environment to ensure any single host failure affects a minimal number of SQL VMs, I suggest using anti-affinity rules, which prevent VMs that belong to the same group from running on the same host. This way, if one host fails, only one SQL VM will be affected and the other SQL VMs will continue running on different hosts.

To create an anti-affinity rule for the SQL VMs, you can follow these steps:

Log in to Prism Central and click on Entities on the left menu.

Select Virtual Machines from the drop-down menu and click on Create Group.

Enter a name for the group, such as SQL Group, and click Next.

Select the SQL VMs (SQL01, SQL02, SQL03) from the list and click Next.

Select Anti-Affinity from the drop-down menu and click Next.

Review the group details and click Finish.

I hope this helps. How else can I help?

https://portal.nutanix.com/page/documents/details?targetId=AHV-Admin-Guide-v6_5:ahv-affinity-policies-c.html

Name	VMs	Hosts	VM Compliance Status	Modified By	Last Modified
<input type="checkbox"/> bugtestaffinity	2	1	▲ 2 Non Compliant	admin	Nov 25, 2022, 07:49 PM

NEW QUESTION # 16

Task 2

An administrator needs to configure storage for a Citrix-based Virtual Desktop infrastructure.

Two VDI pools will be created

Non-persistent pool names MCS_Pool for tasks users using MCS Microsoft Windows 10 virtual Delivery Agents (VDAs)

Persistent pool named Persist_Pool with full-clone Microsoft Windows 10 VDAs for power users

20 GiB capacity must be guaranteed at the storage container level for all power user VDAs The power user container should not be able to use more than 100 GiB Storage capacity should be optimized for each desktop pool.

Configure the storage to meet these requirements. Any new object created should include the name of the pool(s) (MCS and/or Persist) that will use the object.

Do not include the pool name if the object will not be used by that pool.

Any additional licenses required by the solution will be added later.

Answer:

Explanation:

See the Explanation for step by step solution

Explanation:

To configure the storage for the Citrix-based VDI, you can follow these steps:

Log in to Prism Central using the credentials provided.

Go to Storage > Storage Pools and click on Create Storage Pool.

Enter a name for the new storage pool, such as VDI_Storage_Pool, and select the disks to include in the pool. You can choose any combination of SSDs and HDDs, but for optimal performance, you may prefer to use more SSDs than HDDs.

Click Save to create the storage pool.

Go to Storage > Containers and click on Create Container.

Enter a name for the new container for the non-persistent pool, such as MCS_Pool_Container, and select the storage pool that you just created, VDI_Storage_Pool, as the source.

Under Advanced Settings, enable Deduplication and Compression to reduce the storage footprint of the non-persistent desktops.

You can also enable Erasure Coding if you have enough nodes in your cluster and want to save more space. These settings will help you optimize the storage capacity for the non-persistent pool.

Click Save to create the container.

Go to Storage > Containers and click on Create Container again.

Enter a name for the new container for the persistent pool, such as Persist_Pool_Container, and select the same storage pool, VDI_Storage_Pool, as the source.

Under Advanced Settings, enable Capacity Reservation and enter 20 GiB as the reserved capacity. This will guarantee that 20 GiB of space is always available for the persistent desktops. You can also enter 100 GiB as the advertised capacity to limit the maximum space that this container can use. These settings will help you control the storage allocation for the persistent pool.

Click Save to create the container.

Go to Storage > Datastores and click on Create Datastore.

Enter a name for the new datastore for the non-persistent pool, such as MCS_Pool_Datastore, and select NFS as the datastore type. Select the container that you just created, MCS_Pool_Container, as the source.

Click Save to create the datastore.

Go to Storage > Datastores and click on Create Datastore again.

Enter a name for the new datastore for the persistent pool, such as Persist_Pool_Datastore, and select NFS as the datastore type. Select the container that you just created, Persist_Pool_Container, as the source.

Click Save to create the datastore.

The datastores will be automatically mounted on all nodes in the cluster. You can verify this by going to Storage > Datastores and

clicking on each datastore. You should see all nodes listed under Hosts.

You can now use Citrix Studio to create your VDI pools using MCS or full clones on these datastores. For more information on how to use Citrix Studio with Nutanix Acropolis, see [Citrix Virtual Apps and Desktops on Nutanix or Nutanix virtualization environments](#).

Create Storage Container

? x

Name

ST_MCS_Pool

Storage Pool

Storage_Pool

Max Capacity

53.26 TiB (Physical) Based on storage pool free unreserved capacity

Advanced Settings

Replication Factor (?)

2

Reserved Capacity

20

GiB

Advertised Capacity

Total GiB

GiB

Compression

Perform post-process compression of all persistent data. For inline compression, set the delay to 0.

Delay (in minutes)

0

NUTANIX™

Deduplication

Cache

Perform inline deduplication of read caches to optimize performance.

Capacity

Perform post-process deduplication of persistent data.

Erasure Coding (?)

Enable

Erasure coding enables capacity savings across solid-state drives and hard disk drives.

Filesystem Whitelists

Enter comma separated entries

⚙️ Advanced Settings

Cancel

Save

Name

Storage Pool

Max Capacity
53.26 TiB (Physical) Based on storage pool free unreserved capacity

Advanced Settings

Replication Factor ⓘ

Reserved Capacity
 GiB

Advertised Capacity
 GiB

Compression
 Perform post-process compression of all persistent data. For inline compression, set the delay to 0.
 Delay (in minutes)

Deduplication

Cache
 Perform inline deduplication of read caches to optimize performance.

Capacity
 Perform post-process deduplication of persistent data.

Erasur Coding ⓘ

Enable
 Erasure coding enables capacity savings across solid-state drives and hard disk drives.

Filesystem Whitelists

<https://portal.nutanix.com/page/documents/solutions/details?targetId=BP-2079-Citrix-Virtual-Apps-and-Desktops:bp-nutanix-storage-configuration.html>

NEW QUESTION # 17
 Refer to the exhibit.

PSI NUTANIX 01k12rgdtnv6k6vwd1dda5afws lak5lmff

Not Secure http://10.148.15.197:5000

Nutanix NCMCI610

Assessment Info

Tasks

Assessment Review

Assessment Info

Continue Assessment

Environment

You have been provisioned a dedicated environment for your assessment which includes the following:

Initial Steps

- When you first log into Prism Central or Prism Element you may see the EULA screen. Accept the EULA with any name and then disable Pulse
- To access Prism Element, the pass-through from Prism Central (Infrastructure\Hardware\Clusters\cluster-x\Launch Prism Element) works better than directly using the external IP:9440.

Workstation

- Windows Server 2019
- All software/tools/etc to perform the required tasks

TrueAbility 0d 3h 59m 30s

Environment

You have been provisioned a dedicated environment for your assessment which includes the following:

Initial Steps

- When you first log into Prism Central or Prism Element you may see the EULA screen. Accept the EULA with any name and then disable Pulse
- To access Prism Element, the pass-through from Prism Central (Infrastructure\Hardware\Clusters\cluster-x\Launch Prism Element) works better than directly using the external IP:9440.

Workstation

- Windows Server 2019
- All software/tools/etc to perform the required tasks
- Nutanix Documentation and whitepapers can be found in Desktop\Files\Documentation and Desktop\Files\Documentation 6.10
- Note that the Workstation is the system you are currently logged into

- Windows Server 2019
- All software/tools/etc to perform the required tasks
- Nutanix Documentation and whitepapers can be found in Desktop\Files\Documentation and Desktop\Files\Documentation 6.10
- Note that the Workstation is the system you are currently logged into

Nutanix Cluster

- There are two clusters provided, connected to one Prism Central. The connection information for the relevant cluster will be displayed to the right of the question. Please make sure you are working on the correct cluster for each item. Please ignore any licensing violations.

Important Notes

- If the text is too small and hard to read, or you cannot see all of the GUI, you can increase/decrease the zoom of the browser with CTRL + and CTRL - (the plus and minus keys)

Not Secure http://10.148.15.197:5000/assessment/1.1/

NUTANIX

Assessment Info

Tasks

Task 1

Task 2

Task 3

Task 4

Task 5

Task 6

Task 7

Task 8

Task 1

Instructions Notes Feedback Flag for review?

Perform the following task(s).

A newly created Windows VM "SQL02" is experiencing poor storage performance when compared to "SQL01" running within the same cluster, on the same storage container.

The cluster is in a healthy state.

Create a new session named Monitor SQL02 with meaningful metrics. Right click on the session page and click Select All then paste this into Notepad and save it as Task 1.txt on the desktop.

Also, save the analysis as a report named "MonitorSQL02" and send the report as a PDF on a daily basis to perf_group@ACHE.org. Reports should not be retained. If any new objects need to be created, use monitorvm2 in the name.

Environment Info

Prism Central Web Console

- admin / ykZU3CHER7V*
- nutanix / U32x01DEXGY

Cluster 1

CVM external IP : 34.53.118.63

CVM DR IP: 172.30.0.6

- admin / 9Fw08!3Q4XJ
- nutanix / GNP*FE25O4X6Z
- root / KR*6HY0025E8

TrueAbility NUTANIX



Task1

A newly created Windows VM "SQL02" is experiencing poor storage performance when compared to "SQL01" running within the same cluster, on the same storage container.

The cluster is in a healthy state.

Create a new session named Monitor SQL02 with meaningful metrics. Right click on the session page and click Select All then paste this into Notepad and save it as Task 1.txt on the desktop.

Also, save the analysis as a report named "MonitorSQL02" and send the report as a PDF on a daily basis to perf_group@ACME.org. Reports should not be retained. If any new objects need to be created, use monitorvm2 in the name.

Finally, correct the issue within "SQL02"

Notes:

Do not power on the VMs.

While you will be creating a session, you will need to examine the VM configurations to determine the issue.

Do not delete the VM to resolve the issue, any other destructive change is acceptable

Answer:

Explanation:

See the Explanation

Explanation:

This is a classic Nutanix performance troubleshooting scenario. The issue is almost certainly that the VM was created using the wrong Disk Bus Type (IDE or SATA instead of SCSI).

Here is the step-by-step solution to complete Task 1.

Part 1: Analysis and Reporting

Create the Session

Log in to Prism Central (or Prism Element, depending on the exam environment, but Analysis is usually a PC feature).

Navigate to Operations -> Analysis.

Click New Session.

Name: Monitor SQL02

Entity: Search for and select the VM named SQL02.

Metrics: Since the issue is storage performance, search for and add these specific metrics:

Hypervisor IOPS (or Controller IOPS)

Hypervisor IO Latency (or Controller IO Latency)

Hypervisor IO Bandwidth

Click Save.

Save Session Data (Task 1.txt)

Open the "Monitor SQL02" session you just created.

(Per instructions): Right-click anywhere on the chart/data area -> Click Select All.

Copy the selected text (Ctrl+C).

Open Notepad on the provided desktop.

Paste the data.

Save the file as Task 1.txt on the Desktop.

Create and Schedule the Report

While still in the Analysis session, click the Create Report (or "Add to Report") button.

Report Name: MonitorSQL02

Report Settings:

Format: PDF

Frequency: Daily

Email Recipient: perf_group@ACME.org

Retention: 0 (or "Do not retain", as requested).

Note: If the system forces you to create a new Report object and MonitorSQL02 is rejected, use monitorvm2 as the name per the instructions.

Save/Schedule the report.

Part 2: Diagnose and Fix the Issue

The Issue:

VM SQL02 was likely created with its data disks set to IDE or SATA.

Why this causes poor performance: IDE/SATA are emulated hardware with high CPU overhead and low queue depths (single-threaded).

The Standard: SQL01 (the healthy VM) is using SCSI, which is multithreaded and optimized for virtualization.

The Fix (Steps):

Navigate to the VM list in Prism.

Select SQL02 and click Update (or Edit).

Scroll down to the Disks section.

Identify the data disk(s). You will see the Bus Type listed as IDE or SATA.

Do not delete the VM. instead, perform a disk conversion (destructive change to the disk is allowed, but we want to keep the data).

Method to Convert (Clone to SCSI):

Hover over the IDE/SATA disk to see the path/filename of the vDisk (or write it down).

Click Add New Disk.

Operation: select Clone from ADSF file.

Path: Browse to the storage container and select the file associated with the current IDE disk.

Bus Type: Select SCSI (This is the critical fix).

Index: Ensure it doesn't conflict with existing disks (usually index 1 or higher for data).

Click Add.

Once the new SCSI disk is added, find the original IDE/SATA disk and click the X to remove it.

Click Save.

Note: You do not need to power on the VM to verify. The change from IDE to SCSI allows the VM to use the Nutanix VirtIO drivers for maximum storage performance.

NEW QUESTION # 18

Task 13

The application team is reporting performance degradation for a business-critical application that runs processes all day on Saturdays.

The team is requesting monitoring on processor, memory and storage utilization for the three VMs that make up the database cluster for the application: ORA01, ORA02 and ORA03.

The report should contain tables for the following:

At the cluster level, only for the current cluster:

The maximum percentage of CPU used

At the VM level, including any future VM with the prefix ORA:

The maximum time taken to process I/O Read requests

The Maximum percentage of time a VM waits to use physical CPU, out of the local CPU time allotted to the VM.

The report should run on Sundays at 12:00 AM for the previous 24 hours. The report should be emailed to appdev@cyberdyne.net when completed.

Create a report named Weekends that meets these requirements

Note: You must name the report Weekends to receive any credit. Any other objects needed can be named as you see fit. SMTP is not configured.


A: Click Next.

Click on Add to add this custom view to your report. Click Next.

Under the Report Settings option, select Weekly from the Schedule drop-down menu and choose Sunday as the day of week. Enter 12:00 AM as the time of day. Enter appdev@cyberdyne.net as the Email Recipient. Select CSV as the Report Output Format.

Click Next.

Review the report details and click Finish.

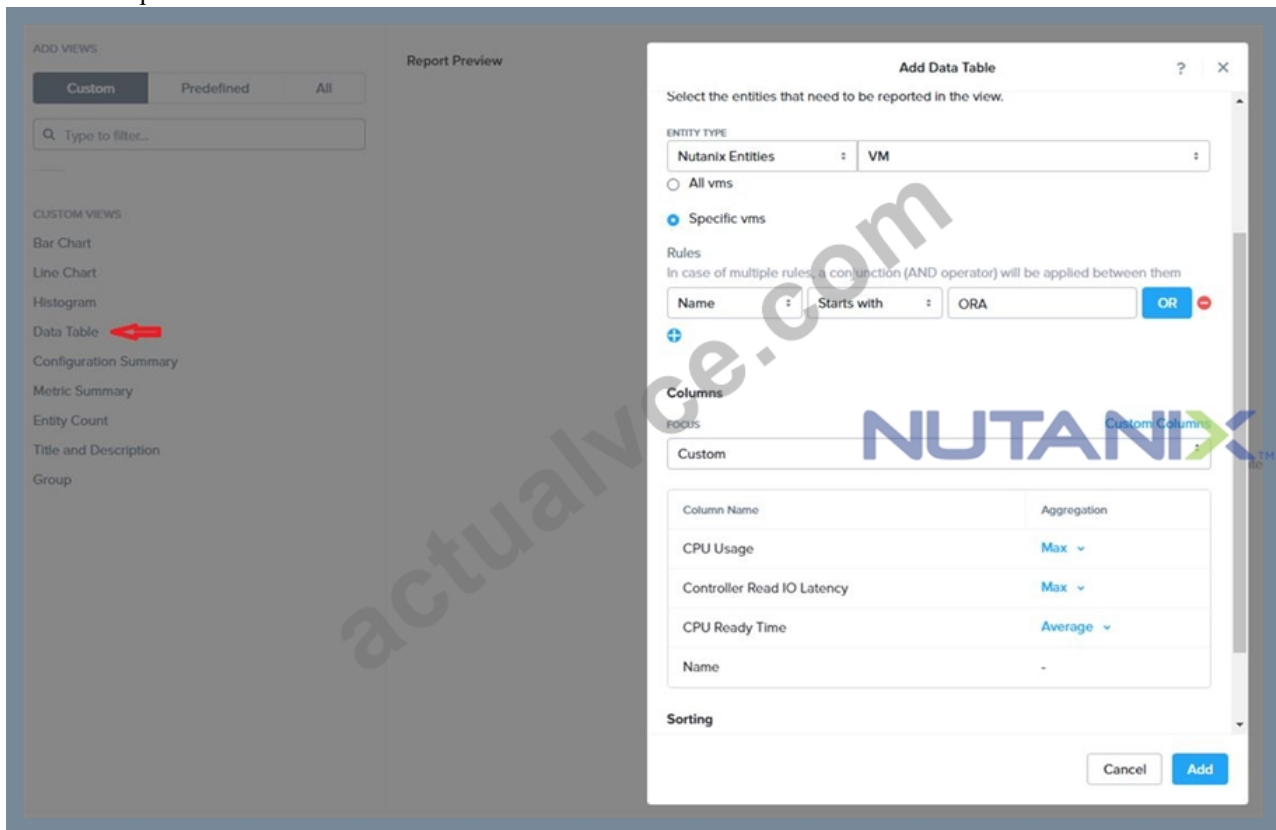

Answer:

Explanation:

See the Explanation for step by step solution

Explanation:

To create a report named Weekends that meets the requirements, you can follow these steps:

Log in to Prism Central and click on Entities on the left menu.

Select Virtual Machines from the drop-down menu and click on Create Report.

Enter Weekends as the report name and a description if required. Click Next.

Under the Custom Views section, select Data Table. Click Next.

Under the Entity Type option, select Cluster. Click Next.

Under the Custom Columns option, add the following variable: CPU Usage (%). Click Next.

Under the Aggregation option for CPU Usage (%), select Max. Click Next.

Under the Filter option, select Current Cluster from the drop-down menu. Click Next.

Click on Add to add this custom view to your report. Click Next.

Under the Custom Views section, select Data Table again. Click Next.

Under the Entity Type option, select VM. Click Next.

Under the Custom Columns option, add the following variables: Name, I/O Read Latency (ms), VM Ready Time (%). Click Next.

Under the Aggregation option for I/O Read Latency (ms) and VM Ready Time (%), select Max. Click Next.

Under the Filter option, enter ORA* in the Name field. This will include any future VM with the prefix OR

NEW QUESTION # 19

Task 6

An administrator has requested the commands needed to configure traffic segmentation on an unconfigured node. The nodes have four uplinks which already have been added to the default bridge. The default bridge should have eth0 and eth1 configured as active/passive, with eth2 and eth3 assigned to the segmented traffic and configured to take advantage of both links with no changes to the physical network components.

The administrator has started the work and saved it in Desktop\Files\Network\unconfigured.txt. Replace any x in the file with the appropriate character or string. Do not delete existing lines or add new lines.

Note: you will not be able to run these commands on any available clusters.

Unconfigured.txt

myportal.utt.edu.tt, socialbuzztoday.com, archstudios-eg.com, alyssaerqs239534.activablog.com, reikicaricias.com, sashagi523113.blogvirals.com, neilizcr214799.governor-wiki.com, psicologocelso.com, Disposable vapes

What's more, part of that ActualVCE NCM-MCI dumps now are free: <https://drive.google.com/open?id=1mMcuAMZ6A1gvrXJ2mJHIAABsZrYh7cF>