


PAP-001 Quiz Prep Makes PAP-001 Exam Easy - PDFVCE

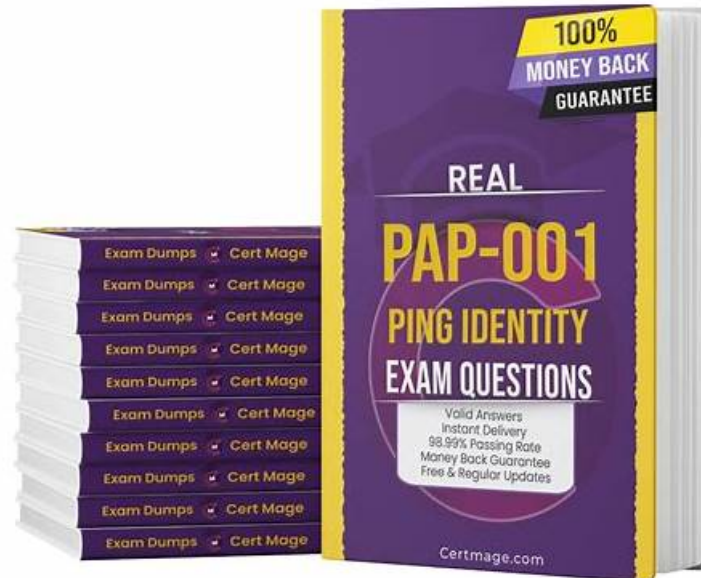

2026 Latest PDFVCE PAP-001 PDF Dumps and PAP-001 Exam Engine Free Share: https://drive.google.com/open?id=1XHk6l7EGm_wFFnPyWSGOR55G-E-aHGKz

No matter you are a fresh man or experienced IT talents, here, you may hear that PAP-001 certifications are designed to take advantage of specific skills and enhance your expertise. While, if you want to be outstanding in the crowd, it is better to get the PAP-001 certification. While, where to find the latest PAP-001 Study Material for preparation is another question. Ping Identity PAP-001 exam training will guide you and help you to get the PAP-001 certification. Hurry up, download PAP-001 test practice torrent for free, and start your study at once.

Our Ping Identity PAP-001 demo products hold the demonstration for our actual products, demos are offered at no cost only for raising your confidence level. Procure the quality of our product in advance, unsighted featured becomes reveal with our PAP-001 Demo products. Free Private Cloud Monitoring and Operations with demos respond to all kind of worries that customers have in their mind while going for actual purchase.

>> Real PAP-001 Braindumps <<

PAP-001 Practice Tests | PAP-001 Latest Exam Practice

Under the leadership of a professional team, we have created the most efficient learning PAP-001 training guide for our users. Our users use their achievements to prove that we can get the most practical knowledge in the shortest time. PAP-001 exam questions are tested by many users and you can rest assured. If you want to spend the least time to achieve your goals, PAP-001 Learning Materials are definitely your best choice. You can really try it we will never let you down!

Ping Identity Certified Professional - PingAccess Sample Questions (Q31-Q36):

NEW QUESTION # 31

Which two protocols does PingAccess use for authentication and authorization? (Choose 2 answers.)

- A. OAuth2
- B. OIDC
- C. SAML
- D. WS-Fed
- E. WS-Trust

Answer: A,B

Explanation:

PingAccess is designed to work with modern identity protocols. It does not support legacy WS-* protocols directly.

Exact Extract:

"PingAccess integrates with OAuth 2.0 and OpenID Connect (OIDC) to provide authentication and authorization for web and API resources."

* Option A (SAML) is incorrect - PingAccess does not natively consume SAML assertions; SAML can be used indirectly via PingFederate.

* Option B (WS-Fed) is not supported.

* Option C (WS-Trust) is not supported.

* Option D (OAuth2) is correct - used for authorization and token validation.

* Option E (OIDC) is correct - used for user authentication and sessions.

Reference: PingAccess Administration Guide - Supported Protocols

NEW QUESTION # 32

What is the purpose of the `admin.authconfiguration` setting?

- A. To override the SSO configuration for the administrative user interface.
- B. To enable automatic authentication to the PingAccess administrative console.
- C. To define the method to use for authenticating to the administrative API.
- D. To configure SSO for the administrative user interface.

Answer: A

Explanation:

The `admin.authsetting` in the `run.properties` file is used to specify a fallback authentication method for the administrative console.

Exact Extract from official documentation:

"To define a fallback administrator authentication method if the OIDC token provider is unreachable, enable the `admin.auth=native` property in the `run.properties` file. This overrides any configured administrative authentication to basic authentication." This makes it clear that the purpose of `admin.auth` is to override any configured SSO for the admin UI and enforce native (basic) authentication instead.

* Option A is incorrect because the `admin.authsetting` does not configure SSO. SSO for the admin UI is configured separately.

* Option B is incorrect because this setting does not apply to the administrative API; it specifically applies to the admin UI console.

* Option C is correct because it directly reflects the documented behavior: `admin.auth` overrides SSO configuration for the administrative UI and enables native authentication.

* Option D is incorrect because the setting does not enable automatic authentication. It still requires credentials, but falls back to basic auth.

Reference: PingAccess User Interface Reference Guide - Configuring Admin UI SSO Authentication

NEW QUESTION # 33

For a Web Application, the `id_token` must be transmitted through a back channel with the OIDC standards-based approach. Which action should the administrator perform in the Web Session to meet this requirement?

- A. Set the request preservation to None
- B. Set the login type to code
- C. Set the request preservation to POST
- D. Set the login type to POST

Answer: B

Explanation:

To transmit the `id_token` via a back channel according to OIDC best practices, the application must use the Authorization Code

Flow(login type =code). This ensures tokens are retrieved securely via the back channel instead of being exposed in the browser.
Exact Extract:

"For back-channel transmission of ID tokens, configure the OIDC login type as Authorization Code."

- * Option A is correct - setting login type to code ensures back-channel delivery.
- * Option B is incorrect - request preservation concerns request method persistence, not OIDC flow.
- * Option C is incorrect - POST is not a valid login type; only Code, Implicit, or Hybrid.
- * Option D is incorrect - request preservation has no bearing on token delivery.

Reference: PingAccess Administration Guide -Configuring OIDC Web Sessions

NEW QUESTION # 34

What is the purpose of the `admin.authconfiguration` setting?

- **A. To override the SSO configuration for the administrative user interface.**
- B. To enable automatic authentication to the PingAccess administrative console.
- C. To define the method to use for authenticating to the administrative API.
- D. To configure SSO for the administrative user interface.

Answer: A

Explanation:

The `admin.auth` setting in the `run.properties` file is used to specify a fallback authentication method for the administrative console.

Exact Extract from official documentation:

"To define a fallback administrator authentication method if the OIDC token provider is unreachable, enable the `admin.auth=native` property in the `run.properties` file. This overrides any configured administrative authentication to basic authentication." This makes it clear that the purpose of `admin.auth` is to override any configured SSO for the admin UI and enforce native (basic) authentication instead.

- * Option A is incorrect because the `admin.auth` setting does not configure SSO. SSO for the admin UI is configured separately.
- * Option B is incorrect because this setting does not apply to the administrative API; it specifically applies to the admin UI console.
- * Option C is correct because it directly reflects the documented behavior: `admin.auth` overrides SSO configuration for the administrative UI and enables native authentication.
- * Option D is incorrect because the setting does not enable automatic authentication. It still requires credentials, but falls back to basic auth.

Reference: PingAccess User Interface Reference Guide -Configuring Admin UI SSO Authentication

NEW QUESTION # 35

An administrator must protect an application on multiple domains or hosts. What should the administrator configure to complete this action?

- **A. Virtual Hosts**
- B. Rules
- C. Sites
- D. Redirects

Answer: A

Explanation:

Applications in PingAccess can be associated with multiple Virtual Hosts. Each virtual host defines an FQDN and port combination through which the application is exposed, allowing protection across multiple domains or hostnames.

Exact Extract:

"Virtual hosts specify the fully qualified domain names (FQDNs) and ports that PingAccess uses to expose applications."

- * Option A (Sites) represent the target back-end servers, not the external FQDN.
- * Option B (Virtual Hosts) is correct - use multiple virtual hosts for multiple domains.
- * Option C (Redirects) are unrelated to multi-domain application protection.
- * Option D (Rules) define access policies, not hostnames.

Reference: PingAccess Administration Guide -Virtual Hosts

NEW QUESTION # 36

As is known to us, different people have different understanding of learning, and also use different methods in different periods, and different learning activities suit different people, at different times of the day. Our PAP-001 test questions are carefully designed by a lot of experts and professors in order to meet the needs of all customers. We can promise that our PAP-001 Exam Question will be suitable for all people, including student, housewife, and worker and so on. No matter who you are, you must find that our PAP-001 guide torrent will help you pass the PAP-001 exam easily.

Ping Identity Real PAP-001 Brandumps You can use Online Test Engine in any electronic device, In other words, your investments with PDFVCE PAP-001 Practice Tests Links to an external site, They check and ensure each PAP-001 practice questions are real, updated, and accurate, So, for that PAP-001 real exam dumps have the demo option as well to make people believe about the authenticity of our product and what exactly are we selling. To take all your worries from you, we have accompanied our Mastering The Certified Professional - PingAccess product with the following assurances: Best Quality Ping Identity Ping Identity PingAccess PAP-001 Exam Questions.

Start Ping Identity PAP-001 Exam Preparation Today And Get Success

To take all your worries from you, we have accompanied our Mastering The Certified Professional - PingAccess product with the following assurances: Best Quality Ping Identity Ping Identity PingAccess PAP-001 Exam Questions.

- P.S. Free & New PAP-001 dumps are available on Google Drive shared by PDFVCE: <https://drive.google.com/open?>

id=1XHk6l7EGm_wFFnPyWSGOR55G-E-aHGKz