


F5CAB4 Exam Dumps Collection, Exam F5CAB4 Braindumps

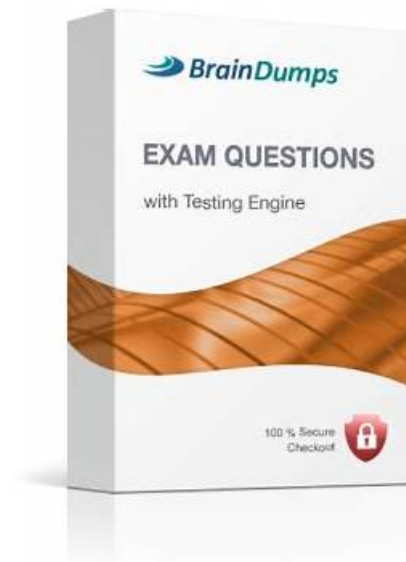

Our company was built in 2008 since all our education experts have more than ten years' experience in F5CAB4 guide torrent. The most important characters we pay attention on are our quality and pass rate. We devote ourselves to improve passing rate constantly and service satisfaction degree of our F5CAB4 training guide. And now you can find the data provided from our loyal customers that our pass rate of F5CAB4 learning guide is more than 98%. You will successfully pass your F5CAB4 exam for sure.

The advantages of our F5CAB4 study materials are plenty and the price is absolutely reasonable. The clients can not only download and try out our products freely before you buy them but also enjoy the free update and online customer service at any time during one day. The clients can use the practice software to test if they have mastered the F5CAB4 Study Materials and use the function of stimulating the test to improve their performances in the real test. So our products are absolutely your first choice to prepare for the test F5CAB4 certification.

>> F5CAB4 Exam Dumps Collection <<

Exam F5 F5CAB4 Braindumps | Test F5CAB4 Passing Score

We have seen that candidates who study with outdated F5CAB4 practice material don't get success and lose their resources. To save you from loss of money and time, BrainDumpsStore is offering a product that is specially designed to help you pass the BIG-IP Administration Control Plane Administration (F5CAB4) exam on the first try. The F5 F5CAB4 Exam Dumps is easy to use and very easy to understand, ensuring that it is student-oriented. You can choose from 3 different formats available according to your

needs. The 3 formats are desktop F5CAB4 practice test software, web-based F5CAB4 practice exam, and F5CAB4 dumps PDF format.

F5 BIG-IP Administration Control Plane Administration Sample Questions (Q44-Q49):

NEW QUESTION # 44

A BIG-IP Administrator needs to verify system time synchronization. Where should this be checked?

- A. System > Platform
- B. System > Logs
- C. System > Software Management
- **D. System > Configuration > Device**

Answer: D

Explanation:

Time synchronization is a critical component of Control Plane management, as it ensures that logs are accurately timestamped and that High Availability (HA) trust relationships remain valid.

* Configuration Location: The list of configured NTP (Network Time Protocol) servers and their status is managed under System > Configuration > Device > NTP .

* Procedural Importance: If the system clock drifts significantly between two devices in an HA pair, the Control Plane may experience a "Time Delta" error. This drift often causes a failure in device trust, preventing the ConfigSync process from functioning correctly.

* System Integrity: Accurate time is also essential for the validity of SSL/TLS certificates used for both administrative management access and high availability communication.

* Verification: Administrators can use this section of the Configuration Utility to confirm that the BIG-IP is communicating with its designated upstream time sources and that the local clock is correctly synchronized to the network environment .

NEW QUESTION # 45

Users are unable to reach an application. The BIG-IP Administrator checks the Configuration Utility and observes that the Virtual Server has a red diamond in front of the status.

What is causing this issue? (Choose one answer)

- A. All pool members are down
- **B. The Virtual Server is disabled**
- C. All pool members have been disabled
- D. The Virtual Server is receiving HTTPS traffic over an HTTP virtual

Answer: B

Explanation:

In the BIG-IP Configuration Utility, status icons provide immediate health information. A red diamond specifically indicates that the object itself is administratively disabled. When a virtual server is disabled, BIG-IP will not accept or process traffic for that virtual server, regardless of pool or node state.

* If all pool members were down, the virtual server would typically show a yellow triangle (available but no resources).

* If all pool members were disabled, the virtual server would usually still be enabled but unavailable due to pool status, not shown as a red diamond.

* Protocol mismatch (HTTPS sent to HTTP) does not change the administrative status icon of the virtual server.

Therefore, the red diamond clearly indicates the virtual server is disabled, making B the correct answer.

NEW QUESTION # 46

The BIG-IP appliance fails to boot. The BIG-IP Administrator needs to run the End User Diagnostics (EUD) utility to collect data to send to F5 Support. Where can the BIG-IP Administrator access this utility?

- A. Management Port
- B. External VLAN interface
- C. Internal VLAN interface

- **D. Console Port**

Answer: D

Explanation:

The EUD is a 33 hardware-level diagnostic tool that runs outside of the TMOS operating system. Because it is used when the system cannot boot or is in a pre-boot state, it cannot be accessed via the GUI or management network. The administrator must connect physically via the serial Console Port to interact with the boot menu and initiate the hardware tests.

NEW QUESTION # 47

Administrative user accounts have been defined on the remote LDAP server and are unable to log in to the BIG-IP device. Which log file should the BIG-IP Administrator check to find the related messages? (Choose one answer)

- A. /var/log/user.log
- B. /var/log/ltm
- C. /var/log/messages
- **D. /var/log/secure**

Answer: D

Explanation:

When BIG-IP is configured to use remote authentication (such as LDAP), all authentication and authorization attempts-including successes and failures-are logged to /var/log/secure.

For LDAP-based administrative login issues, /var/log/secure contains:

- * LDAP authentication failures
- * PAM authentication errors
- * Authorization and access-denied messages
- * Details explaining why a remote user could not log in

Why the other options are incorrect:

- * /var/log/user.log is not a standard BIG-IP log file for authentication.
- * /var/log/ltm logs traffic management events, not user authentication.
- * /var/log/messages contains general system messages but not detailed authentication failure information.

Therefore, the correct log file to troubleshoot LDAP administrative login failures is /var/log/secure.

NEW QUESTION # 48

As an organization grows, more people have to log into the BIG-IP. Instead of adding more local users, the BIG-IP Administrator is asked to configure remote authentication against a central authentication server.

Which two types of remote server can be used here? (Choose two answers)

- A. OAUTH
- B. SAML
- **C. RADIUS**
- **D. LDAP**

Answer: C,D

Explanation:

BIG-IP supports remote authentication by integrating with centralized authentication services through its AAA framework. The supported and commonly used remote authentication servers include:

- * LDAP (A) Used to authenticate users against directory services such as Active Directory or other LDAP-compliant directories.
- * RADIUS (C) Commonly used for centralized authentication, authorization, and accounting, especially in network and security environments.

Why the other options are incorrect:

* OAUTH (B) is an authorization framework, not supported as a direct administrative authentication backend for BIG-IP management access.

* SAML (D) is primarily used for single sign-on (SSO) in application authentication scenarios, not for BIG-IP administrative login authentication.

Thus, the correct remote authentication server types are LDAP and RADIUS.

• • • • •

Exam F5CAB4 Braindumps: <https://www.troytecdumps.com/F5CAB4-troytec-exam-dumps.html>

- [illegible]

myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt,
myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, myportal.utt.edu.tt, www.stes.tyc.edu.tw, www.stes.tyc.edu.tw,
www.stes.tyc.edu.tw, Disposable vapes