

試験の準備方法-効果的なFCSS_SDW_AR-7.4トレーニングサンプル試験-実際的なFCSS_SDW_AR-7.4資格トレーニング



さらに、Tech4Exam FCSS_SDW_AR-7.4 ダンプの一部が現在無料で提供されています：https://drive.google.com/open?id=1zUQrvT7yaBZlMAiQin8_SAFJKjLYR6jx

弊社のサイトは受験生の皆さんにさまざまな高品質の商品を提供できます。あなたはFCSS_SDW_AR-7.4試験に参加する予定があると、弊社の無料な試用版のFCSS_SDW_AR-7.4問題と回答を使用することができます。それでは、この問題集はあなたに適用するかどうかを確認した後、購入することを決定します。Tech4Exam FCSS_SDW_AR-7.4問題集を使って試験に合格しない場合に、当社は全額返金できます。

Fortinet FCSS_SDW_AR-7.4 認定試験の出題範囲：

トピック	出題範囲
トピック 1	<ul style="list-style-type: none">ルールとルーティング：ネットワークエンジニアを対象としたこのセクションでは、SD-WANルールとルーティングポリシーを構成する能力を評価します。受験者は、SD-WANインフラストラクチャ全体のトラフィックフローと優先順位付けの管理についてテストされます。
トピック 2	<ul style="list-style-type: none">上級IPsec：セキュリティエンジニア向けのこのセクションでは、ハブアンドスポークモデル、ADVPN構成、複雑なマルチハブまたはマルチリージョン展開など、SD-WAN向けの高度なIPsecトポロジの導入について解説します。受験者は、IPsecテクノロジーを用いた広域ネットワークのセキュリティ確保に関する専門知識を証明する必要があります。
トピック 3	<ul style="list-style-type: none">パフォーマンスSLAの設定：ネットワーク管理者向けに設計されたこのパートでは、SD-WAN環境におけるパフォーマンスSLA（サービスレベル契約）の設定に焦点を当てています。受験者は、ネットワークのパフォーマンスと信頼性を監視および維持するための基準を定義する能力を示す必要があります。

>> FCSS_SDW_AR-7.4トレーニングサンプル <<

FCSS_SDW_AR-7.4試験の準備方法 | ユニークなFCSS_SDW_AR-7.4トレーニングサンプル試験 | 効果的なFCSS - SD-WAN 7.4 Architect資格トレーニング

Tech4ExamのIT認証試験問題集は長年のトレーニング経験を持っています。Tech4Exam FortinetのFCSS_SDW_AR-7.4試験トレーニング資料は信頼できる製品です。当社のスタッフは受験生の皆様が試験で高い点数を取るように保証できるように、巨大な努力をして皆様に最新版のFCSS_SDW_AR-7.4試験トレーニング資料を提供してい

ます。Tech4Exam FortinetのFCSS_SDW_AR-7.4試験材料は最も実用的なIT認定材料を提供することを確認することができます。

Fortinet FCSS - SD-WAN 7.4 Architect 認定 FCSS_SDW_AR-7.4 試験問題 (Q72-Q77):

質問 # 72

Refer to the exhibits. You use FortiManager to configure SD-WAN on three branch devices.

When you install the device settings, FortiManager prompts you with the error "Copy Failed" for the device branch1_fat When you click the log button, FortiManager displays the message shown in the exhibit.

Based on the exhibits, which statement best describes the issue and how you can resolve it?

SD-WAN template zones and rules configuration



SD-WAN Zones

+ Create New Edit Delete Q, Where Used Search...

ID	Interface	Gateway	Cost	Priority	Status	Installation Target
virtual-wan-link						
underlay						
1	port1	\$(sdwan_port1_gw)	0	1	Enable	
2	port2	0.0.0.0	0	1	Enable	
WAN3						
3	port4	\$(sdwan_port4_gw)	0	1	Enable	1 Device In Total branch1_fgt [root]
HUB1						
4	HUB1-VPN1	0.0.0.0	0	1	Enable	
5	HUB1-VPN2	0.0.0.0	0	1	Enable	
6	HUB1-VPN3	0.0.0.0	0	1	Enable	

SD-WAN Rules

+ Create New Edit Delete More Search...

ID	Name	Source	Destination	Criteria	Members	Performance SLA	Port	Protocol	Status
1	Critical-DIA	LAN-r	Salesforce Microsoft		port1 port2		any	any	Enable
3	Corp	LAN-r	Corp-net		HUB1-VPN1 HUB1-VPN2 HUB1-VPN3		any	any	Enable
sdwan	All	All		Source IP	All		any	any	

FortiManager error message

Install Wizard - Validate Devices (3/4)

Task finished with errors

Installation Preparation Total: 4/4 Success: 3 Warning: 0 Error: 1 Show Details 100%

Ready to Install
Only successfully validated device may be installed. Please confirm and click "Install" button to continue.

Install Preview Search...

Device Name	Status	Action
branch1_fgt	Copy Failed	Log
branch2_fgt	Connection Up	
branch3_fgt	Connection Up	

View install log in FortiManager

View Install Log

```
Copy device global objects
Copy objects for vdom root
Commit failed:
error -999 - - (from Template Group Corp-SOT_BRANCH) (in Template branches) invalid ip - prop[gateway]: ip4class($(sdwan_port1_gw)) invalid ip addr
```

- A. Gateways for all members in a zone must be defined the same way. Specify the gateway of the SD-WAN member port! without metadata variables.

- B. Check the metadata variable definitions, and review the per-device mapping configuration.
- C. Check the connection between branch1_fgt and FortiManager
- D. Remove the installation target for the SD-WAN member port4. You cannot combine metadata variable and installation targets.

正解: D

質問 # 73

What are three key routing principles of SD-WAN? (Choose three.)

- A. SD-WAN rules are skipped if the best route to the destination is a static route
- B. Directly connected routes have precedence over SD-WAN rules.
- C. SD-WAN rules are skipped if the best route to the destination is not an SD-WAN member.
- D. SD-WAN members are skipped if they do not have a valid route to the destination.
- E. Policy routes have precedence over SD-WAN rules.

正解: C、D、E

解説:

SD-WAN members without a valid route to the destination are skipped during path selection.

If the best route is not via an SD-WAN member, SD-WAN rules are skipped.

Policy routes take precedence over SD-WAN rules in the routing decision process.

質問 # 74

Refer to the exhibit. The administrator configured the IPsec tunnel VPN1 on a FortiGate device with the parameters shown in exhibit.

Based on the configuration, which three conclusions can you draw about the characteristics and requirements of the VPN tunnel? (Choose three.)

```
config vpn ipsec phase1-interface
  edit "VPN1"
    set interface "port1"
    set ike-version 2
    set peertype any
    set exchange-interface-ip enable
    set mode-cfg disable
    set proposal aes256-sha256
  ...
end
end
```

FORTINET

- A. The administrator must manually assign the tunnel interface IP address on the hub side
- B. The remote end can be a third-party IPsec device.
- C. The remote end must support IKEv2.
- D. The tunnel interface IP address on the spoke side is provided by the hub.
- E. This configuration allows user-defined overlay IP addresses.

正解: A、B、C

解説:

set peertype any allows interoperability with third-party IPsec devices.

set ike-version 2 requires the remote peer to support IKEv2.

set mode-cfg disable means no IP address will be pushed, so the hub must assign the interface IP manually.

質問 # 75

Refer to the exhibit.

```

ike V=root:0:VPN1_0:9: received informational request
ike V=root:0:VPN1_0:9: processing notify type SHORTCUT_QUERY
ike V=root:0:VPN1_0: recv shortcut-query 5752810260829471092 6d5cdb5ceab1874d
/000000000000000000 192.2.0.1 10.0.1.101:2048->10.0.3.101:0 0 psk 64 ppk 0 ttl
32 nat 0 ver 2 mode 0 network-id 1
ike V=root:0:VPN1: iif 20 10.0.1.101->10.0.3.101 0 route lookup oif 20 VPN1
gw 192.168.1.4
ike V=root:0: shared dev tunnel lookup, tun-id=192.168.1.4
ike V=root:0:VPN1_3: forward shortcut-query 5752810260829471092 6d5cdb5ceab18
74d/000000000000000000 192.2.0.1 10.0.1.101->10.0.3.101 0 psk 64 ppk 0 ttl 31
ver 2 mode 0, ext-mapping 192.2.0.1:0, network-id 1

```


Which statement best describe the role of the ADVPN device in handling traffic?

- A. This is a spoke that has received a shortcut query from another spoke and has forwarded the response to its hub.
- B. This is a hub that has received a query from a spoke and has forwarded it to another spoke.
- C. This is a hub in a dual-region topology. The remote hub tunnel ID is 10.0.2.101.
- D. This is a spoke. The kernel received a shortcut request and forwards the query to another spoke.

正解: A

質問 # 76

Refer to the exhibit.

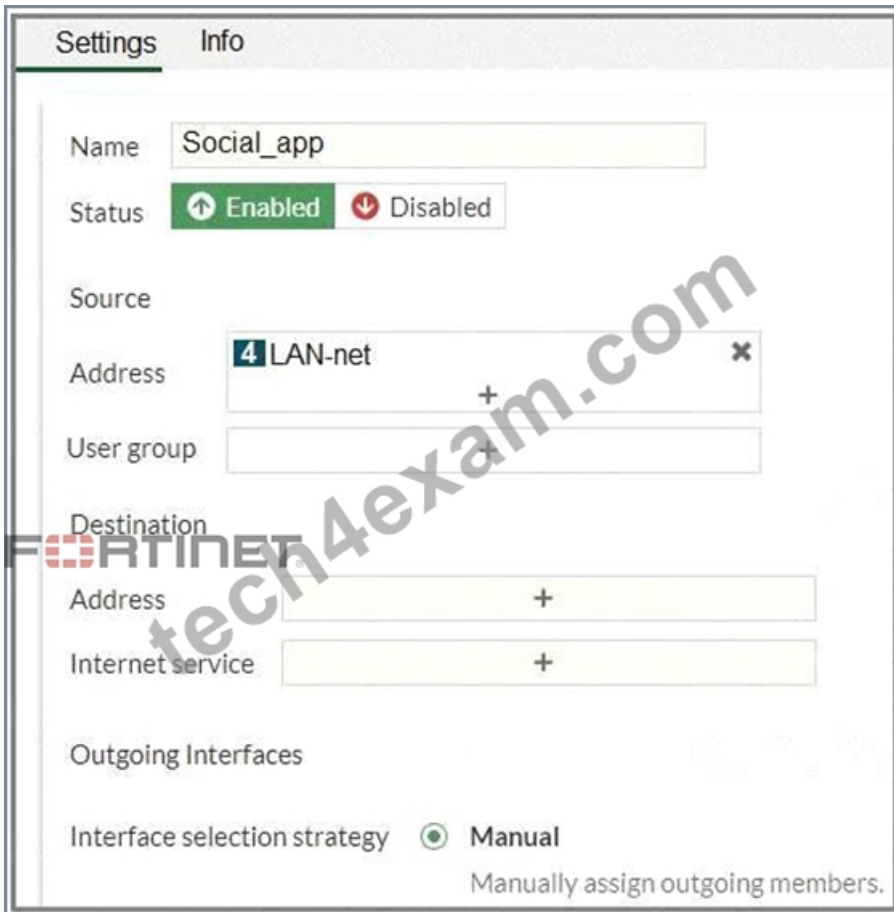

You configure SD-WAN on a standalone FortiGate device. You want to create an SD-WAN rule that steers Facebook and LinkedIn traffic through the less costly internet link. The FortiGate GUI page appears as shown in the exhibit. What should you do to set Facebook and LinkedIn as destinations?

- A. In the Internet service field, select Facebook and LinkedIn.
- B. You cannot configure applications as destinations of an SD-WAN rule on a standalone FortiGate device.
- C. Install a license to allow applications as destinations of SD-WAN rules.
- D. Enable the applications as destinations of the SD-WAN rule feature visibility.

正解: A

解説:

P.S.Tech4ExamがGoogle Driveで共有している無料の2026 Fortinet FCSS_SDW_AR-7.4ダウンロード: https://drive.google.com/open?id=1zUQrvT7yaBZIMAiQim8_SAFJKjLYR6jx